

Gun Safes / Sefovi za oružje

VALBERG

series: **GS**

grade: **S1 (IMP)**

Seriya: **GS**

Stepen: **S1 (IMP)**



MULTI
LAYER SYSTEM



GS 1433

GS 1253

model											
GS 1253	1250	545	345	1244	539	295	240-200-245	1000	6	80	159/12
GS 1423	1450	210	280	1444	204	230	145-204-195	1295	3	47	61/6
GS 1433	1450	255	345	1444	249	295	145-249-265	1295	5	57	95/9
GS 1443	1450	375	345	1444	369	295	145-369-265	1295	7	69	141/14


* The outer depth is given without the handle and the lock. /
Spoljašnje dimenzije su prikazane bez ručke i brave.



Key lock /
Brava na ključ



Digital lock /
Elektronska brava

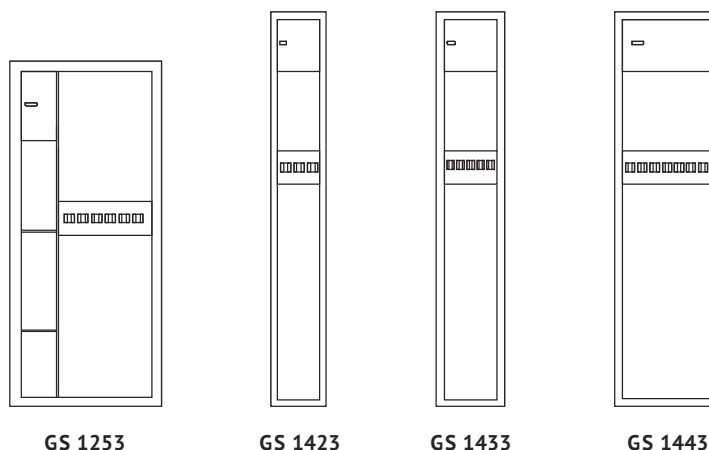

GS 1253

GS 1423

GS 1433

GS 1443

- Burglary resistance – EN 14450 IMP, Grade S1.
- Thickness of front panel – 2.8 mm.
- Thickness of walls – 2.8 mm.
- Three way locking bolts.
- Integrated relocker, lock secured from drill attacks.
- Standard delivery with double-bit high security key lock with two keys.
- Color: RAL 7024 (dark grey), also available in RAL 7035 (light grey).

- Protivprovalnost – EN 14450 IMP, Stepen S1.
- Debljina prednjeg panela – 2.8 mm.
- Debljina zidova – 2.8 mm.
- Zaključavanje u tri smera.
- Integrisana unutrašnja pregrada, brava zaštićena od bušenja.
- Standardna isporuka sa visokosigurnosnom dvobradom bravom sa 2 ključa.
- Boja: RAL 7024 (tamno siva), takođe dostupno i u RAL 7035 (svetlo siva).